




RIVERSIDE GOLF COURSE PARKING LOT PAVING

Project Description:

Project consists of a double seal coat of the parking lot, followed by striping and installation of new bumper blocks. Prepare the surface of the parking lot by sweeping and removing existing parking bumper blocks. After surface preparation, the contractor shall make note of the existing striping and mark required spots for final re-striping. Contractor to fill any holes left from the bumper blocks with sand/asphalt mixture. Contractor to provide a double seal coat with HFRS-2P and PB GR3 aggregate for the bottom course and HFRS-2P and PB GR4 on the top course. Contractor application rates will follow industry standards with final determination set in the field between contractor and engineer. Upon completion of the clean-up, the contractor shall stripe and install bumper blocks.

Start Date: Estimated	00/00/0000
Completion:	00/00/0000
Contractor:	Construction Company
Engineering Firm:	COV
Construction Cost:	\$100,000.00
Percent Complete:	0% Complete

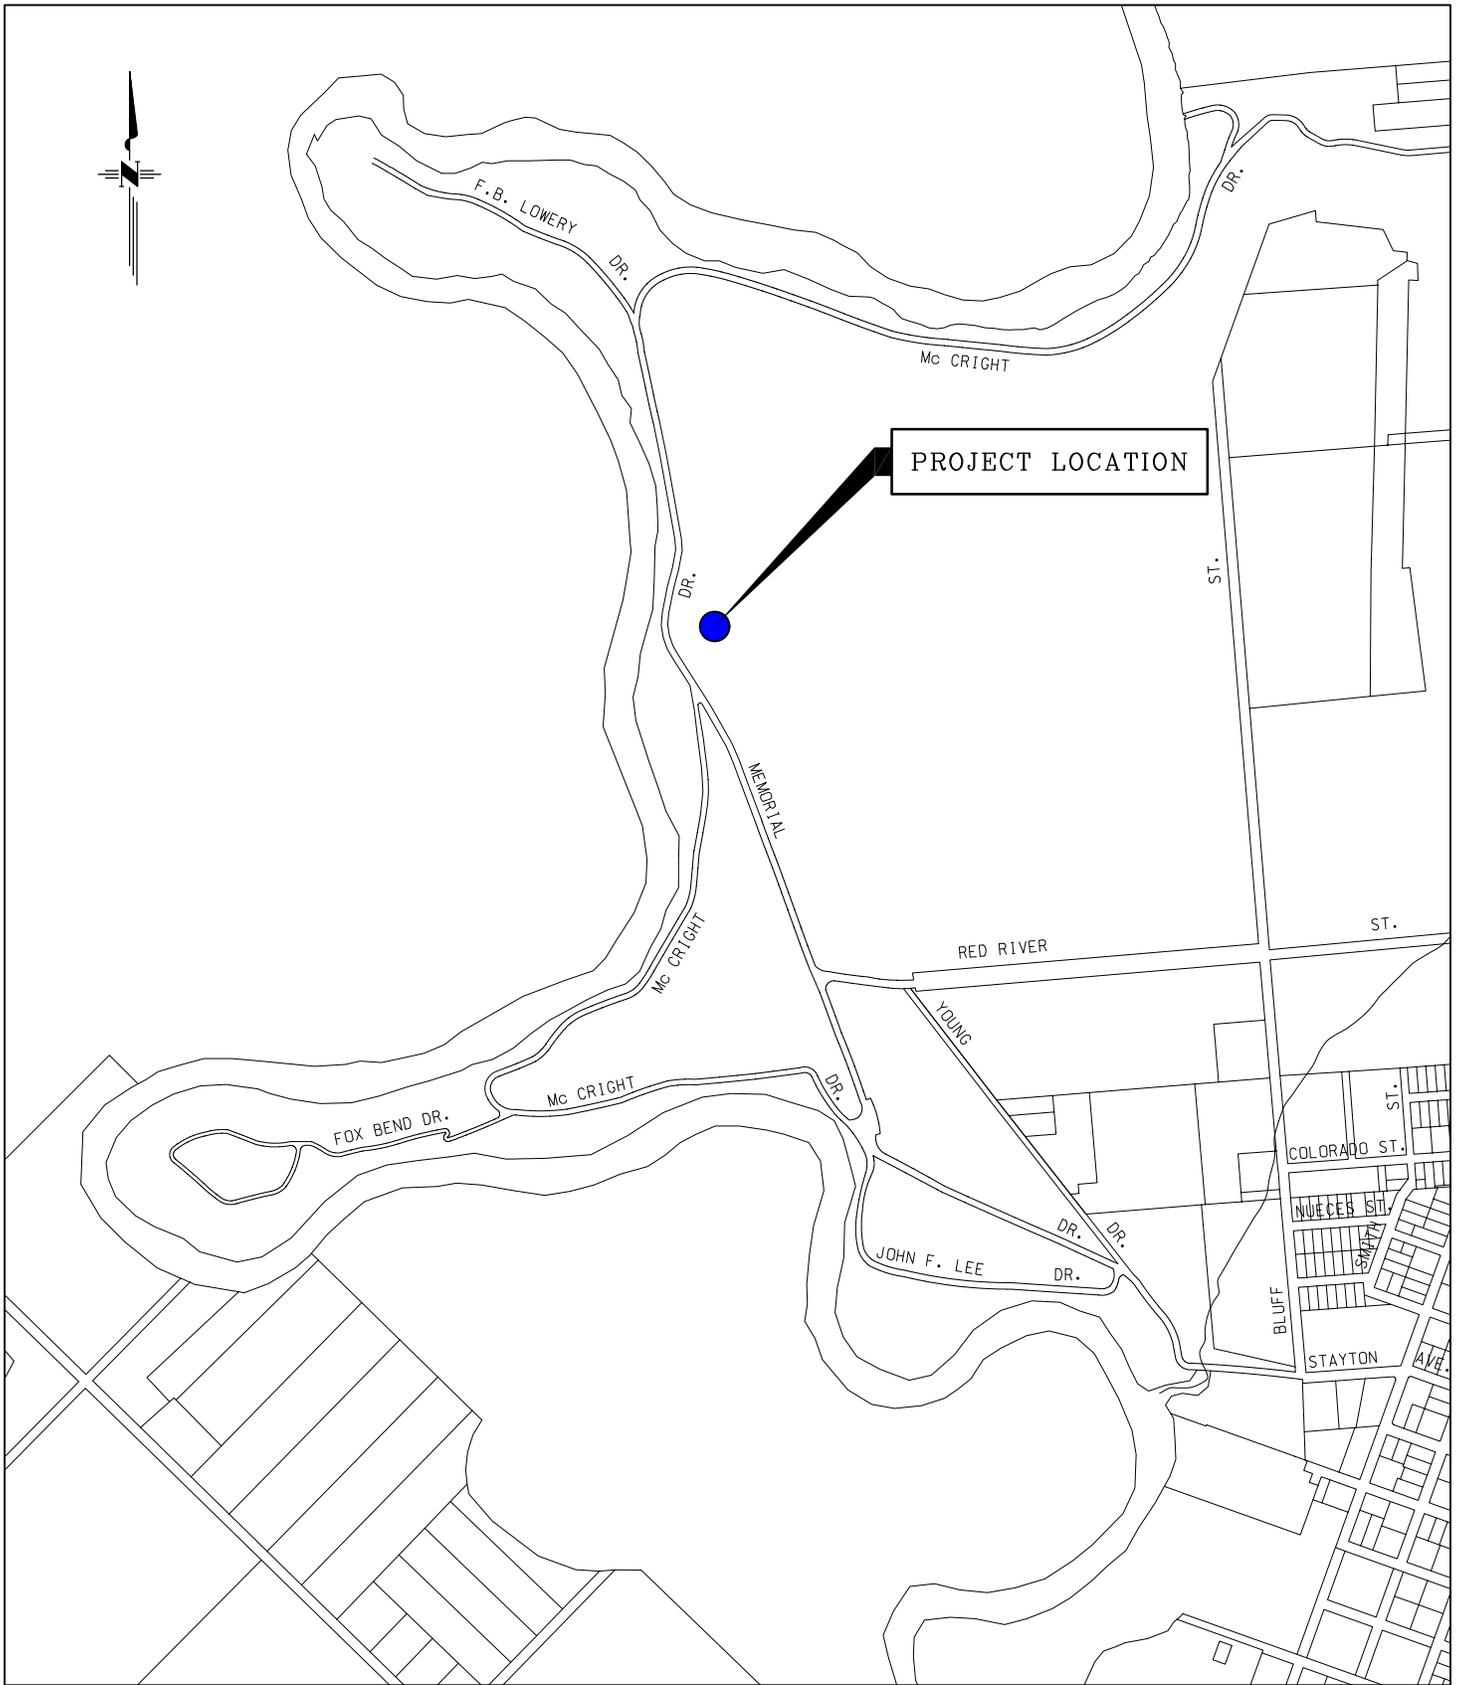

700 MAIN CENTER
SUITE 201
VICTORIA, TX 77901

CITY OF VICTORIA
ENGINEERING DIVISION
P.O. BOX 1758
VICTORIA, TX 77902-1758

RIVERSIDE GOLF COURSE PARKING LOT PAVING

DRAWN BY: J. GONZALES

DATE: 08/12/25

REV'D:

SHEET: 1 OF 1

PROJECT